

FORM PTO-1390 (Modified)
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

4417

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/806852

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP99/05498

October 5, 1999

October 5, 1998

TITLE OF INVENTION

PHOTOSENSITIVE POLYSILAZANE COMPOSITION AND METHOD OF
FORMING PATTERNED POLYSILAZANE FILM

APPLICANT(S) FOR DO/EO/US

- 1) Tatsuro NAGAHARA, 2) Hideki MATSUO,
3) Tomoko AOKI and 4) Kazuhiro YAMADA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Specification and drawings

The filing fee must be based upon the claims as amended and added in the attached Preliminary Amendment.

Information Sheet

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) 09/806852		INTERNATIONAL APPLICATION NO. PCT/JP99/05498		ATTORNEY'S DOCKET NUMBER 4417	
20. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input checked="" type="checkbox"/> Search Report has been prepared by the EPO or JPO \$860.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) \$670.00 <input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$760.00 <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$970.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$96.00				CALCULATIONS PTO USE ONLY \$860.00	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than _____ months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30					
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	23 - - =	3	x \$18.00	\$54.00	
Independent claims	2 - - =	0	x \$80.00		
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>					
TOTAL OF ABOVE CALCULATIONS				=	\$914.00
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>					
SUBTOTAL				=	\$914.00
Processing fee of \$130.00 for furnishing the English translation later than _____ months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30					
TOTAL NATIONAL FEE				=	\$914.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>					
TOTAL FEES ENCLOSED				=	\$914.00
				Amount to be refunded	\$
				charged	\$

- ☐ A check in the amount of _____ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. 01-1944 in the amount of \$914.00 to cover the above fees. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 01-1944 A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Anderson, Kill & Olick P.C
1251 Avenue of the Americas
New York, NY 10020-1182

(212) 278-1000

SIGNATURE

Eugene Lieberstein

NAME

24,645

REGISTRATION NUMBER

April 4, 2001

DATE

PTD
09/806852

JC08 Rec'd PCT/PTO 04 APR 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN THE MATTER OF:

NAGAHARA et al

ORDER/DOCKET NO.: 4417

FOR: PHOTSENSITIVE POLYSILAZANE COMPOSITION AND METHOD OF
FORMING PATTERNED POLYSILAZANE

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents
& Trademarks
Washington, DC 20231

S I R:

This application is a continuation of PCT/JP99/05498 filed October 5,
1999.

It is requested that the application be amended as follows.

Please replace the pages containing claims 1-14 with the attached pages
containing claims 1-23. Also, attached is a copy of claims 2, 3, 5, 6, 8 and 10 as
amended and a copy of new claims 15-23.

REMARKS

A Preliminary Amendment has been made to eliminate the multiple
dependency of claims 6, 8 and 10 including the addition of new claims 15-23. The
amendment is believed to place the application in better condition for examination and
allowance.

It is respectfully requested that the amendment be entered before calculation of the filing fee and before examination by the Examiner.

Respectfully submitted,




Eugene Lieberstein
Registration No. 24,645

ANDERSON, KILL & OLICK
1251 Avenue of the Americas
New York, New York 10020-1182
(212) 278-1000


IN THE CLAIMS

2. (Amended: The photosensitive polysilazane composition according to claim 1 wherein said polysilazane is mainly a polysilazane, or [its] a modification product [having a number] thereof with said polysilazane having an average molecular weight of between about 100 to 50,000, [that contains the] and a skeleton represented with the following general formula (I):



[([wherein, R¹, R² and R³ respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group])].

3.(Amended) The photosensitive polysilazane composition according to claim 1 wherein said polysilazane [is mainly a polysilazane having a number] has an average molecular weight of between about 100 to 100,000 [that contains the] and a skeleton represented with the following general formula (II):



[([wherein, R⁴ and R⁵ respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group, and n is an arbitrary integer])].

5. (Amended) The photosensitive polysilazane composition according to claim 2 wherein said polysilazane modification product is a polyorganosiloxazane having an [a number] average molecular weight of between about 300 to 100,000 that contains, as its main repeating unit, $-\text{RsiN}_3-$, $-\text{RsiN}_2\text{O}-$, $(\text{RsiNO}_2)-$ and $-\text{RsiO}_3-$ (wherein, R is an alkyl group, an alkenyl group, a cycloalkyl group, and aryl group, an alkylamino group of an alkylsilyl group).

6. (Amended) The photosensitive polysilazane composition according to [any of claims] claim 2 [through 5] wherein said photoacid generator is a peroxide.

8. (Amended) The photosensitive polysilazane composition according to [any one of claims 1 through 7 that additionally contains] claim 1 further comprising a sensitizing dye.

10. (Amended) The photosensitive polysilazane composition according to [either of claims 8 or 9 that additionally contains] claim 8 further comprising an oxidation catalyst.

15. (New) The photosensitive polysilazane composition according to claim 3 wherein said photoacid generator is a peroxide.

16. (New) The photosensitive polysilazane composition according to claim 4 wherein said photoacid generator is a peroxide.

17. (New) The photosensitive polysilazane composition of claim 2 further comprising a sensitizing dye.

18. (New) The photosensitive polysilazane composition of claim 3 further comprising a sensitizing dye.

19. (New) The photosensitive polysilazane composition of claim 6 further comprising a sensitizing dye.

20. (New) The photosensitive polysilazane composition of claim 8 wherein said sensitizing dye is selected from coumarin, ketocoumarin and their derivatives and thiopyrylium salts.

21. (New) The photosensitive polysilazane composition of claim 10 wherein said sensitizing dye is selected from coumarin, ketocoumarin and their derivatives and thiopyrylium salts.


22. (New). The photosensitive polysilazane composition according to claim 9 further comprising an oxidation catalyst.

23. (New) The photosensitive polysilazane composition according to claim 21 wherein said oxidation catalyst is palladium propionate.

What is claimed is:


1. A photosensitive polysilazane composition comprising a polysilazane and a photoacid generator.

2. The photosensitive polysilazane composition according to claim 1 wherein said polysilazane is mainly a polysilazane, or a modification product thereof with said polysilazane having an average molecular weight of between about 100 to 50,000, and a skeleton represented with the following general formula (I):



wherein, R^1 , R^2 and R^3 respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group.

3. The photosensitive polysilazane composition according to claim 1 wherein said polysilazane has an average molecular weight of between about 100 to 100,000 and a skeleton represented with the following general formula (II):



wherein, R^4 and R^5 respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group, and n is an arbitrary integer.

4. The photosensitive polysilazane composition according to claim 3 wherein, in the above formula (II), R^4 is a methyl group or phenyl group, and R^5 is a hydrogen atom.

5. The photosensitive polysilazane composition according to claim 2 wherein said polysilazane modification product is a polyorganosiloxazane having an average molecular weight of between about 300 to 100,000 that contains, as its main repeating unit, $-(R\text{SiN}_3)-$, $-(R\text{SiN}_2\text{O})-$, $(R\text{SiNO}_2)-$ and $-(R\text{SiO}_3)-$ (wherein, R is an alkyl group, an alkenyl group, a cycloalkyl group, and aryl group, an alkylamino group of an alkylsilyl group).

6. The photosensitive polysilazane composition according to claim 2 wherein said photoacid generator is a peroxide.

7. The photosensitive polysilazane composition according to claim 6 wherein said peroxide is t-butyl peroxybenzoate, 3,3',4,4'-tetra(t-butylperoxycarbonyl) benzophenone or α , α' -bis(t-butylperoxy) diisopropylbenzene.

8. The photosensitive polysilazane composition according to claim 1 further comprising a sensitizing dye.

10. The photosensitive polysilazane composition according to claim 8 further comprising an oxidation catalyst.

11. The photosensitive polysilazane composition according to claim 10 wherein said oxidation catalyst is palladium propionate.

12. A method of forming a patterned polysilazane film comprising: a step in which a coated film is formed of a photosensitive polysilazane composition comprising a polysilazane and a photoacid generator, a step in which said coated film is exposed to light in a pattern, and a step in which the exposed portion of said coated film is dissolved off.

13. The method according to claim 12, wherein, said dissolving off step is performed using a weakly alkaline aqueous solution.

14. A method of forming a patterned insulating film containing a step in which a patterned polysilazane film formed by the method according to claim 12 is converted to a

15. The photosensitive polysilazane composition according to claim 3 wherein said photoacid generator is a peroxide.

16. The photosensitive polysilazane composition according to claim 4 wherein said photoacid generator is a peroxide.

17. The photosensitive polysilazane composition of claim 2 further comprising a sensitizing dye.

18. The photosensitive polysilazane composition of claim 3 further comprising a sensitizing dye.

19. The photosensitive polysilazane composition of claim 6 further comprising a sensitizing dye.

20. The photosensitive polysilazane composition of claim 8 wherein said sensitizing dye is selected from coumarin, ketocoumarin and their derivatives and thiopyrylium salts.

21. The photosensitive polysilazane composition of claim 10 wherein said sensitizing dye is selected from coumarin, ketocoumarin and their derivatives and thiopyrylium salts.

22. The photosensitive polysilazane composition according to claim 9 further comprising an oxidation catalyst.

23. The photosensitive polysilazane composition according to claim 21 wherein said oxidation catalyst is palladium propionate.

09/806852

SPECIFICATION JC08 Rec'd PCT/PTO 04 APR 2001

PHOTOSENSITIVE POLYSILAZANE COMPOSITION AND METHOD OF
FORMING PATTERNED POLYSILAZANE FILM

5

Technical Field

The present invention relates to a photosensitive polysilazane composition, and more particularly, to a photodecomposable polysilazane composition that is able to form a film that allows fine patterning processing by light, along with a method of forming a patterned polysilazane film and an insulating film using this composition.

15 Background Art

The use of photoresists in the production of semiconductor devices is widely known. Photoresists consist of negative types, which are resistant to dissolving in developing liquid due to exposure to light, and positive types, which, conversely, easily dissolve in developing liquid due to exposure to light.

These photoresists are required to have numerous sophisticated characteristics. In particular, in the processing of semiconductor devices, which are continuing to employ increasingly fine technology, the photoresists used in that processing are required to have high resolution. In general, positive photoresists are able to achieve higher resolution than negative photoresists.

In addition, dry etching is frequently used in fine patterning of semiconductor devices, and those photoresists are also required to withstand oxygen plasma (oxygen plasma resistance).

In general, acrylic polymers and numerous other types of organic materials are used as photoresist materials. Photoresists are removed following completion of patterning (etching treatment) by ashing using oxygen plasma and/or by a suitable solvent.

On the other hand, in the production of semiconductor devices and liquid crystal displays, interlayer insulating films and various other elements are patterned. These elements are typically exposed to high temperatures in excess of 400°C in the production process of semiconductor devices and so forth (for example, wiring deposition process by CVD). Thus, since organic materials have inadequate heat resistance, it is desirable to use inorganic materials. In particular, patterned silica-based ceramic films are known to be useful in semiconductor devices, liquid crystal displays and printed circuit boards, etc. as films having excellent heat resistance as well as excellent wear resistance, corrosion resistance, electrical resistance, transparency and so forth. For example, a method is described in Japanese Unexamined Patent Publication No. 5-88373 for forming a ceramic film pattern by coating a coating liquid containing polysilazane onto a substrate to form a coated film, and irradiating said coated film with ultraviolet light in an oxidizing atmosphere to cure the portion exposed to the ultraviolet light followed by removing the portion not exposed to the ultraviolet light. Since the above ceramic film pattern remains following curing of the portion exposed to light, it is considered to be a negative photoresist.

As described above, the processing of semiconductor devices is employing increasingly fine technology. Consequently, a type of resist is desired that is a positive resist having high resolution which also has a high degree of oxygen plasma resistance. In addition, in the case of use by allowing the patterned film to remain as an interlayer insulating film, in addition to the above requirement relating to hyperfine technology, a material is desired that is superior in terms of high heat resistance, low dielectric constant, transparency and so forth that are required for use as an interlayer insulating film.

Disclosure of the Invention


As a result of conducting extensive research, the inventors of the present invention unexpectedly found that, when a photoacid generator is added to a polysilazane, a patterned polysilazane film is obtained by decomposing the polysilazane by irradiation with light, and removing the portion exposed to light by a following development, thereby leading to completion of the present invention.

Namely, the present invention provides the following:

- (1) a photosensitive polysilazane composition containing a polysilazane and a photoacid generator; and,
- (2) a method of forming a patterned polysilazane film comprising: a step in which a coated film is formed of a photosensitive polysilazane composition containing a polysilazane and a photoacid generator, a step in which said coated film is exposed to light in a pattern, and a step in which the exposed portion of said coated film is dissolved off.

The following provides a list of preferable examples of the present invention.

- (3) The photosensitive polysilazane composition described in (1) wherein said polysilazane is mainly a polysilazane or its modification product having a number average molecular weight of 100 to 50,000 that contains the skeleton represented with the following general formula (I):



(wherein, R¹, R² and R³ respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to

silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group).

(4) The photosensitive polysilazane composition described in (1) wherein said polysilazane is mainly a polysilazane having a number average molecular weight of 100 to 100,000 that contains the skeleton represented with the following general formula (II):



(wherein, R^4 and R^5 respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group, and n is an arbitrary integer).

(5) The photosensitive polysilazane composition described in (4) wherein, in the above formula (II), R^4 is a methyl group or phenyl group, and R^5 is a hydrogen atom.

(6) The photosensitive polysilazane composition described in (3) wherein, said polysilazane modification product is polyorganosiloxazane having a number average molecular weight of 300 to 100,000 that contains as its main repeating unit $-(RSiN_3)-$, $-(RSiN_2O)-$, $(RSiNO_2)-$ and $-(RSiO_3)-$ (wherein, R is an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, an alkylamino group or an alkylsilyl group).

(7) The photosensitive polysilazane composition described in (1) or any of (3) through (6) wherein, said photoacid generator is a peroxide.

(8) The photosensitive polysilazane composition described in (7) wherein, said peroxide is *t*-butyl peroxybenzoate, 3,3',4,4'-tetra(*t*-butylperoxycarbonyl)benzophenone or α,α' -bis(*t*-butylperoxy)diisopropylbenzene.

(9) The photosensitive polysilazane composition described in (1) or any of (3) through (8) that additionally contains a sensitizing dye.

5 (10) The photosensitive polysilazane composition described in (9) wherein, said sensitizing dye is selected from coumarin, ketocoumarin and their derivatives and thiopyrylium salts.

10 (11) The photosensitive polysilazane composition described in (9) or (10) that additionally contains an oxidation catalyst.

(12) The photosensitive polysilazane composition described in (11) wherein said oxidation catalyst is palladium propionate.

15 (13) The method described in (2) wherein said dissolving off step is performed using a weakly alkaline aqueous solution.

20 (14) A method of forming a patterned insulating film containing a step in which the patterned polysilazane film formed by the method described in (2) is converted to a silica-based ceramic coating by allowing the film to stand in an ambient atmosphere or by baking the film.

25 According to the present invention, by adding a photoacid generator to polysilazane, the polysilazane is decomposed by exposing it to light in a pattern followed by developing to obtain a patterned polysilazane film.

30 The patterned polysilazane film can be used directly as a photoresist. Since the photoresist according to the present invention is a positive photoresist, it has high resolution as well as greater resistance to oxygen plasma than organic material-based resists. In particular, since the polysilazane film according to the present invention has high resistance to oxygen plasma, it is extremely useful as an alternative material to silicon-containing resists in dual layer resist methods.

35 In addition, by allowing the patterned polysilazane film according to the present invention to stand for a long period of time or by baking the film, a patterned

silica-based ceramic coating is obtained having high heat resistance, low dielectric constant and excellent transparency that are suitable for use as an interlayer insulating film.

5 By incorporating a sensitizing dye into the photosensitive polysilazane composition of the present invention, positive patterning can be performed using an inexpensive light source such as a high-pressure mercury lamp.

10 Moreover, by incorporating an oxidation catalyst into the composition of the present invention that contains a sensitizing dye, the sensitizing dye can be decomposed during baking the patterned coating, thereby obtaining a transparent, silica-based ceramic coating
15 that is useful as the interlayer insulating film of a liquid crystal display and so forth.

In addition, by adding a pigment to the photosensitive polysilazane composition according to the present invention, a color filter or black matrix can be
20 produced having excellent heat resistance, insulation and hardness as well as satisfactory pattern accuracy.

Brief Description of the Drawings

25 Figs. 1A through 1F are schematic drawings showing the patterning step of an insulating film according to the prior art.

Figs. 2A through 2D are schematic drawings showing the patterning step of a ceramic film according to the present invention.

30

Best Mode for Carrying Out the Invention


In addition to being able to use a polysilazane alone, the polysilazane used in the present invention can also be used in the form of a copolymer of a polysilazane
35 and another polymer, or in the form of a mixture of a polysilazane and other compounds(s).

The polysilazane used consists of that which has a


chain, ring or crosslinked structure, or that which simultaneously has a plurality of these structures within its molecule, and these can be used alone or as a mixture.

5 Although the following lists some typical examples of polysilazanes used, the polysilazane used in the present invention is not limited to these. A perhydropolysilazane is preferable in terms of hardness and fineness of the resulting film, while
10 organopolysilazane is preferable with respect to flexibility. Selection of these polysilazanes can be suitably performed by a person with ordinary skill in the art according to the specific application.

The compound having hydrogen atoms for R^1 , R^2 and R^3
15 in the above general formula (I) is a perhydropolysilazane, and its production method is reported in, for example, Japanese Examined Patent Publication No. 63-16325, and by D. Seyferth et al. in Communication of Am. Cer. Soc., C-13, January 1983.
20 Although the products obtained from these methods are mixtures of polymers having various structures, they basically contain a chain portion and ring portion in their molecule, and can be represented by the following chemical formula:



An example of the structure of a perhydropolysilazane is shown below.

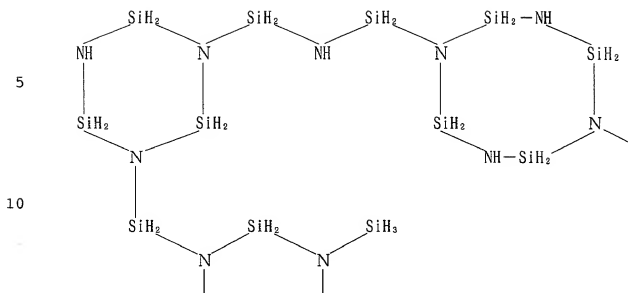

The production method of a polysilazane having hydrogen atoms for R^1 and R^2 and a methyl group for R^3 in general formula (I) is reported by D. Seyferth et al. in Polym. Prepr., Am. Chem. Soc., Div. Polym. Chem., 25, 10 (1984). The polysilazanes obtained by this method are chain polymers and ring polymers having for their repeating unit $-(SiH_2NCH_3)-$, and none of them have crosslinked structures.


The production method of polyorgano(hydro)silazane having hydrogen atoms for R^1 and R^3 and an organic group for R^2 is reported by D. Seyferth et al. in Polym. Prepr., Am. Chem. Soc., Div. Polym. Chem., 25, 10 (1984), Japanese Unexamined Patent Publication No. 61-89230 and Japanese Unexamined Patent Publication No. 62-156135. Polysilazanes obtained by these methods mainly have a ring structure with a degree of polymerization of 3-5 and have for their repeating unit $-(R^2SiHNNH)-$, or simultaneously have a chain structure and ring structure within their molecules as indicated by the chemical formula $(R^3SiHNNH)_x[(R^2SiH)_{1.5}N]_{1-x}$ ($0.4 < x < 1$).

Polysilazane having a hydrogen atom for R^1 and organic groups for R^2 and R^3 in general formula (I), or that having organic groups for R^1 and R^2 and a hydrogen

atom for R^3 mainly has a ring structure with a degree of polymerization of 3-5 and has for its repeating unit $-(R^1R^2SiNR^3)-$.

Although the polysilazane used has a main skeleton consisting of the unit represented with the above general formula (I), the unit represented by general formula (I) may be in the form of a ring as is also clear from that previously described, and in this case, that ring portion becomes the terminal group. In the case such a ring is not formed, the terminal of the main skeleton can be a group similar to R^1 , R^2 and R^3 or a hydrogen atom.

Among polyorgano(hydro)silazanes, there are some which have a crosslinked structure within their molecules as reported by D. Seyferth et al. in Communication of Am. Cer. Soc., C-132, July 1984. An example of such a structure is shown below.

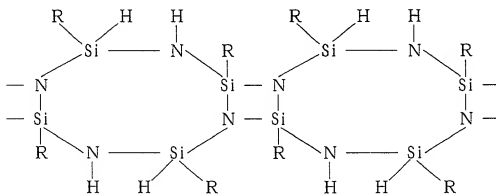


In addition, polysilazanes having a crosslinked structure that are obtained by ammonolysis of R^1SiX_3 (X : halogen) as reported in Japanese Unexamined Patent Publication No. 49-69717 ($R^1Si(NH)_x$), or polysilazanes having the following structure that are obtained by co-ammonolysis of R^1SiX_3 and R^2SiX_2 , can also be used as starting materials.



5 (m,n: positive integers)

In addition, as an example of a polysilazane modification product, polymetallosilazanes containing a metal atom in the manner of, for example, the following structure (wherein, the side chain metal atom M may or may not crosslink) can also be used as starting materials.




15 (m,n: positive integers)

20 (M: metal atom)

Other polysilazanes that can be used include polysiloxazanes represented with the repeating units of $[(SiH_2)_n(NH)_m]$ and $[(SiH_2)_xO]$ (wherein, n, m and r are respectively 1, 2 or 3) as reported in Japanese Unexamined Patent Publication No. 62-195024, polyborosilazanes having excellent heat resistance produced by reacting a boron compound with a polysilazane as reported in Japanese Unexamined Patent Publication No. 2-84437, polymetallosilazanes produced by reacting a polysilazane with a metal alkoxide as reported in Japanese Unexamined Patent Publication No. 63-81122, Japanese Unexamined Patent Publication No. 63-191832 and Japanese Unexamined Patent Publication No. 2-77427, inorganic silazane polymers and modified polysilazanes having increased molecular weight (as described in the first four following publications) or improved hydrolysis resistance (as described in the last two following

publications) as reported in Japanese Unexamined Patent Publication No. 1-138108, Japanese Unexamined Patent Publication No. 1-138107, Japanese Unexamined Patent Publication No. 1-203429, Japanese Unexamined Patent Publication No. 1-203430, Japanese Unexamined Patent Publication No. 4-63833 and Japanese Unexamined Patent Publication No. 3-320167, copolymer polysilazanes useful for thick film formation in which an organic component is introduced into a polysilazane as reported in Japanese Unexamined Patent Publication No. 2-175726, Japanese Unexamined Patent Publication No. 5-86200, Japanese Unexamined Patent Publication No. 5-331293 and Japanese Unexamined Patent Publication No. 3-31326, and low-temperature ceramic polysilazane converting to a ceramic at lower temperatures that allows application to plastic or a metal such as aluminum to which has been imparted with have added to a catalyst compound for promoting ceramic conversion of polysilazane as reported in Japanese Unexamined Patent Publication No. 5-238827, Japanese Unexamined Patent Publication No. 6-122852, Japanese Unexamined Patent Publication No. 6-299188, Japanese Unexamined Patent Publication No. 6-306329, Japanese Unexamined Patent Publication No. 6-240208 and Japanese Unexamined Patent Publication No. 7-196986.

Polysilazanes that are particularly suitable in the present invention are polysilazanes having a number average molecular weight of 100-100,000, and preferably 300-10,000, containing a skeleton mainly represented with the following general formula (II):



(wherein, R^4 and R^5 are respectively and independently a hydrogen atom, alkyl group, alkenyl group, cycloalkyl group, aryl group, a group other than the above groups in which the portion that bonds directly to silicon or nitrogen is carbon, an alkylsilyl group, alkylamino group

or alkoxy group, and n is an arbitrary integer). The most preferable polysilazane is polymethylsilazane in which R⁴ is a methyl group and R⁵ is a hydrogen atom in formula (II), or a polyphenylsilazane in which R⁴ is a phenyl group and R⁵ is a hydrogen atom in formula (II).

These polysilazanes are easily obtained by using R⁴SiCl₃ for the starting material in ammonolysis when synthesizing ordinary polysilazanes. Namely, polymethylsilazane is obtained from CH₃SiCl₃, while polyphenylsilazane is obtained from C₆H₅SiCl₃. Japanese Examined Patent Publication No. 63-16325, by the present applicant, for example, should be referred to with respect to the ammonolysis during polysilazane synthesis.

Examples of preferable polysilazane modification products in the present invention include polyorganosiloxazanes, having a number average molecular weight of 300-100,000, that contain as their main repeating unit -(RSiN₃)-, -(RSiN₂O)-, -(RSiNO₂)- and -(RSiO₃)- (wherein, R is an alkyl group, alkenyl group, cycloalkyl group, aryl group, alkylamino group or alkylsilyl group). These polyorganosiloxazanes can be produced by reacting ammonia and water with an organic halosilane represented with general formula R_nSiX_{4-n} (wherein, R is an alkyl group, alkenyl group, cycloalkyl group, aryl group, alkylamino group or alkylsilyl group, X is a halogen atom and n is 1 or 2). Since these polyorganosiloxazanes allow the obtaining of a baked film that exhibits a low dielectric constant even when treated at high temperatures, they are particularly useful as the precursors of interlayer insulating films. In addition, in the case of polyorganosiloxazanes, the relative dielectric constants of the baked films can be controlled by changing the oxygen content contained in the main chain, thereby offering the advantage of being able to easily provide the desired relative dielectric constant. The specification of Japanese Patent Application No. 10-528633 filed by the present applicant should be referred

to for details regarding such polyorganosiloxazanes and their production method.

The photosensitive polysilazane composition according to the present invention contains a photoacid generator. A photoacid generator is transformed to an excited state either directly by exposure to light in a characteristic photosensitive wavelength region, or indirectly by exposing to light in a wavelength region in which a sensitizing dye is excited in the case of using a sensitizing dye. The Si-N bonds of polysilazane are cleaved by the photoacid generator in an excited state, and silanol (Si-OH) bonds are thought to be formed as a result of reacting with moisture in the atmosphere by going through a dangling bond state. Since silanol is soluble in the developing liquid to be described later, only the portion of the coated film of the photosensitive polysilazane composition exposed to light is dissolved, resulting in the achievement of positive patterning.

Said photoacid generator can be a peroxide. Specific examples of peroxide-based photoacid generators include 3,3',4,4'-tetra(t-butylperoxycarbonyl)benzophenone, t-butyl peroxybenzoate, methyl ethyl ketone peroxide, cyclohexanone peroxide, methylcyclohexanone peroxide, methylacetoacetate peroxide, acetylacetone peroxide, 1,1-bis(t-hexylperoxy)3,3,5-trimethylcyclohexane, 1,1-bis(t-hexylperoxy)cyclohexane, 1,1-bis(t-butylperoxy)3,3,5-trimethylcyclohexane, di-t-butylperoxy-2-methylcyclohexane, 1,1-bis(t-butylperoxy)cyclohexane, 1,1-bis(t-butylperoxy)cyclododecane, 2,2-bis(t-butylperoxy)butane, n-butyl 4,4-bis(t-butylperoxy)valerate, 2,2-bis(4,4-di-t-butylperoxycyclohexyl)propane, p-menthane hydroperoxide, diisopropylbenzene hydroperoxide, 1,1,3,3-tetramethylbutyl hydroperoxide, cumene hydroperoxide, t-hexyl hydroperoxide, t-butyl hydroperoxide, α,α' -bis(t-butylperoxy)diisopropylbenzene, dicumyl peroxide, 2,5-

dimethyl-2,5-bis(t-butylperoxy)hexane, t-butylcumylperoxide, di-t-butylperoxide, 2,5-dimethyl-2,5-bis(t-butylperoxy)hexyne-3, isobutyl peroxide, 3,5,5-trimethylhexanoyl peroxide, octanoyl peroxide, lauroyl
5 peroxide, stearoyl peroxide, succinyl peroxide, m-toluoylbenzoyl peroxide, benzoyl peroxide, di-n-propyl peroxydicarbonate, diisopropyl peroxydicarbonate, bis(4-t-butylcyclohexyl) peroxydicarbonate, di-2-ethoxyethyl peroxydicarbonate, di-2-ethylhexyl peroxydicarbonate, di-
10 3-methoxybutyl peroxydicarbonate, di(3-methyl-3-methoxybutyl) peroxydicarbonate, α,α' -bis(neodecanoylperoxy)diisopropylbenzene, cumyl peroxyneodecanoate, 1,1,3,3-tetramethylbutyl peroxyneodecanoate, 1-cyclohexyl-1-methylethyl
15 peroxyneodecanoate, t-hexyl peroxyneodecanoate, t-butyl peroxyneodecanoate, t-hexyl peroxy-pivalate, t-butyl peroxy-pivalate, 1,1,3,3-tetramethylbutyl peroxy-2-ethylhexanoate, 2,5-dimethyl-2,5-bis(2-ethylhexanoylperoxy)hexane, 1-cyclohexyl-1-methylethyl
20 peroxy-2-ethylhexanoate, t-hexyl peroxy 2-ethylhexanoate, t-butyl peroxy 2-ethylhexanoate, t-butyl peroxyisobutyrate, t-hexyl peroxyisopropylmonocarbonate, t-butyl peroxy-maleate, t-butyl peroxy 3,5,5-trimethyl hexanoate, t-butyl peroxy-laurate, 2,5-dimethyl-2,5-(m-toluoylperoxy)hexane, t-butyl
25 peroxyisopropylmonocarbonate, t-butyl peroxy 2-ethylhexylmonocarbonate, t-hexyl peroxybenzoate, 2,5-dimethyl-2,5-bis(benzoylperoxy)hexane, t-butyl peroxyacetate, t-butyl peroxy-m-toluoylbenzoate, bis(t-butylperoxy)isophthalate, t-butyl
30 peroxyallylmonocarbonate, t-butyl trimethylsilylperoxide, 2,3-dimethyl-2,3-diphenylbutane, 1,3-di(t-butylperoxycarbonyl)benzene and the like. Said photoacid generator can also be a naphthoquinone diazidosulfonate ester or nitrobenzyl ester. Specific examples of
35 naphthoquinone diazidosulfonate ester-based photoacid generators include 1,2-naphthoquinone-(2)-diazido-5-

sulfonate chloride, 1,2-naphthoquinone-(2)-diazido-4-sulfonate chloride, mono- to triesters of 2,3,4-trihydroxybenzophenone, and 6-diazo-5,6-dihydro-5-oxo-naphthalene-1-sulfonic acid, and mono- to triesters of 2,3,4,4'-trihydroxybenzophenone, 6-diazo-5,6-dihydro-5-oxo-naphthalene-1-sulfonic acid and the like. Specific examples of nitrobenzyl ester-based photoacid generators include nitrobenzyl tosylate, dinitrobenzyl tosylate, nitrobenzyl chloride, dinitrobenzyl chloride, nitrobenzyl bromide, dinitrobenzyl bromide, nitrobenzyl acetate, dinitrobenzyl acetate, nitrobenzyl trichloroacetate, nitrobenzyl trifluoroacetate and the like. Another useful photoacid generator is benzoin tosylate. These photoacid generators can also be used in combination as necessary.

The photosensitive polysilazane composition according to the present invention typically contains 0.05-50 wt% of the above photoacid generator relative to the weight of polysilazane according to the type of photoacid generator and application. If the content of photoacid generator is less than 0.05 wt%, the decomposition reaction rate becomes extremely slow, and conversely, if the content of photoacid generator exceeds 50 wt%, it becomes difficult to obtain a fine film that is a characteristic inherent to polysilazane. The photoacid generator is preferably contained at 0.1-20 wt%, and more preferably at 1-20 wt%, relative to the weight of polysilazane.

Preparation of the photosensitive polysilazane composition according to the present invention is performed by adding the above photoacid generator to polysilazane. The photoacid generator is preferably mixed uniformly and, in order to accomplish this, the polysilazane and photoacid generator are preferably mixed while adequately stirring, or they are mixed after being respectively dissolved in a solvent to be described later and diluted. In the case the photoacid generator is a


solid during mixing in particular, it is preferable to mix after first dissolving in a solvent.

There are no particular restrictions on the temperature and pressure during addition, and addition
5 can be performed at room temperature and under atmospheric pressure. However, during the time from addition of photoacid generator to the development step to be described later, work should be performed in an atmosphere that does not contain the photosensitive
10 wavelength of the optically acid-generating agent used, and preferably in a dark location, so as to prevent excitation of the photoacid generator.

There are cases in which it is advantageous to mix a sensitizing dye into the photosensitive polysilazane composition according to the present invention.
15 Depending on the particular photoacid generator, as in the manner of, for example, 3,3',4,4'-tetra(t-butylperoxycarbonyl)benzophenone, the wavelength at which that substance itself is excited is shorter than about 20 330 nm. In the case of performing light exposure using an excimer laser such as a KrF-based (248 nm) or ArF-based (193 nm) laser, since the photoacid generator is excited directly, there is no need to use a sensitizing dye. However, in the case of using an inexpensive light
25 source such as a high-pressure mercury lamp (360-430 nm), the photoacid generator can be excited indirectly by combining a sensitizing dye that is excited in that wavelength region. In this manner, the photosensitive polysilazane composition of the present invention can be
30 patterned using an inexpensive light source by adding a sensitizing dye.


Examples of the sensitizing dye that can be used in the photosensitive polysilazane composition of the present invention include coumarin, ketocoumarin and
35 their derivatives, thiopyrylium salts and so forth, specific examples of which include p-bis(o-methylstyryl)benzene, 7-dimethylamino-4-methylquinolone-

2, 7-amino-4-methylcoumarin, 4,6-dimethyl-7-ethylaminocoumarin, 2-(p-dimethylaminostyryl)-pyridylmethyl iodide, 7-diethylaminocoumarin, 7-diethylamino-4-methylcoumarin, 2,3,5,6-1H,4H-tetrahydro-8-methylquinolidino-<9,9a,1-gb>coumarin, 7-diethylamino-4-trifluoromethylcoumarin, 7-dimethylamino-4-trifluoromethylcoumarin, 7-amino-4-trifluoromethylcoumarin, 2,3,5,6-1H,4H-tetrahydroquinolidino-<9,9a,1-gb>coumarin, 7-ethylamino-6-methyl-4-trifluoromethylcoumarin, 7-ethylamino-4-trifluoromethylcoumarin, 2,3,5,6-1H,4H-tetrahydro-9-carboethoxyquinolidino-<9,9a,1-gb>coumarin, 3-(2'-methylbenzimidazolyl)-7-N,N-diethylaminocoumarin, N-methyl-4-trifluoromethylpiperidino-<3,2-g>coumarin, 2-(p-dimethylaminostyryl)-benzothiazolylethyl iodide, 3-(2'-benzimidazolyl)-7-N,N-diethylaminocoumarin, 3-(2'-benzothiazolyl)-7-N,N-diethylaminocoumarin, and the pyrylium salts and thiopyrylium salts represented by the formula indicated below.

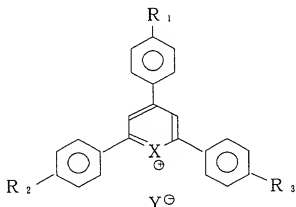

X	R ₁	R ₂	R ₃	Y
S	OC ₂ H ₅	H	H	BF ₄
S	OC ₂ H ₅	H	H	BF ₄
S	OC ₂ H ₅	OCH ₃	OCH ₃	BF ₄
S	H	OCH ₃	OCH ₃	BF ₄
S	N(CH ₃) ₂	H	H	ClO ₂
O	OC ₂ H ₅	H	H	SbF ₆

Moreover, the following lists different specific examples of sensitizing dyes.

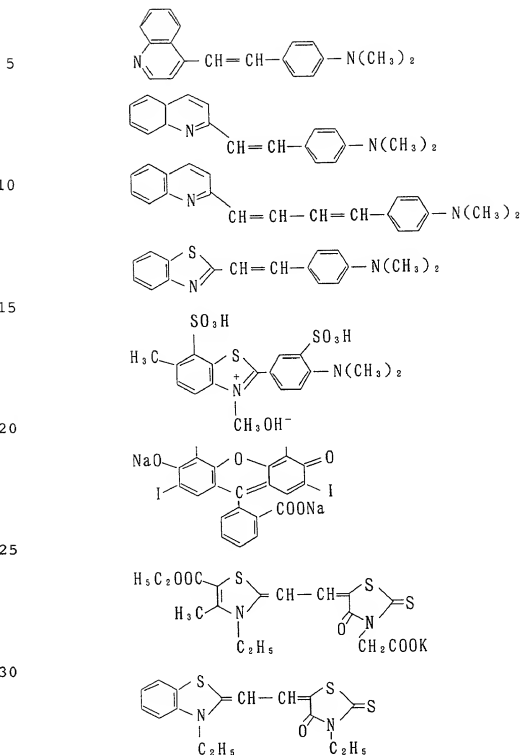

Particularly preferable sensitizing dyes are 7-diethylamino-4-methylcoumarin and 7-diethylamino-4-trifluoromethylcoumarin.

In the case of combining a sensitizing dye, the above sensitizing dye should be typically contained at 0.05-50 wt%, and preferably at 1-20 wt%, relative to the weight of polysilazane in the photosensitive polysilazane composition according to the present invention.

In the case of mixing a sensitizing dye into the photosensitive polysilazane composition according to the present invention, the resulting film may be colored. In the case of using said composition as a photoresist, since said resist is removed following completion of the desired patterning, coloring of the resist hardly presents any problems. However, in the case of preparing an interlayer insulating film that is patterned using the composition of the present invention and so forth, when this is used without removing the film containing a sensitizing dye after patterning, there are cases in which it is necessary that the film after baking be transparent with respect to visible light. In such cases as well, the photoacid generator contained in the composition of the present invention is able to decompose the sensitizing dye during film baking to make the film transparent. Moreover, although not directly involved in the photoreaction, by separately adding an oxidation catalyst that decomposes the sensitizing dye during film baking to the composition of the present invention, an even more transparent film can be obtained. Examples of such oxidation catalysts include organic compounds and fine particles, etc. of metals, such as palladium propionate, palladium acetate, platinum acetylacetonate, platinum ethylacetonate, palladium fine particles and platinum fine particles.

In the case of adding an oxidation catalyst, typically 0.05-10 wt%, and preferably 0.1-5 wt%, should be contained relative to the weight of polysilazane in the photosensitive polysilazane composition according to the present invention. In addition, the addition of this oxidation catalyst not only decomposes and decolorizes

any unnecessary dye, but also promotes the ceramic conversion of a polysilazane.

As a different mode of the present invention, a polysilazane composition can be obtained that is suitable for the production of color filters and black matrices having excellent heat resistance, insulation and hardness as well as satisfactory pattern accuracy by adding a pigment to the above photosensitive polysilazane composition. In color filters and black matrices obtained from the photosensitive polysilazane composition containing a pigment according to the present invention, since the pigment is dispersed in silica-based ceramics, oxygen is blocked out resulting in excellent heat resistance (oxidation resistance at high temperatures), and even if the pigment itself is electrically conductive, an insulator is obtained in the form of a color filter or black matrix. In addition, since silica-based ceramic films have a higher degree of hardness than typical acrylic, polyimide or other organic films, the surface workability (film deposition, wiring and bonding work) of the resulting color filter or black matrix is satisfactory, making it possible to improve the yield. Moreover, the amount of gas generated by the ceramic film during heating is extremely low in comparison with the amount of gas generated from typical organic films.

Examples of pigments that can be added to the photosensitive polysilazane composition of the present invention include graphite, carbon black, titanium black, iron oxide, copper-chromium black, copper-iron-manganese black and cobalt-iron-chromium black. The amount of pigment added is typically 0.05-1000 wt%, and preferably 10-500 wt%, relative to the weight of polysilazane.

In the case of using a pigment, preparation of the photosensitive polysilazane composition containing the pigment according to the present invention is performed by adding the above photoacid generator and/or the above sensitizing dye and/or the above oxidation catalyst along

with the pigment to polysilazane. Although there is no particular problem with the order of addition, it is preferable that both be mixed uniformly. In order to accomplish this, it is preferable that they be mixed with adequate stirring during addition, or that they be mixed after dissolving or dispersing photoacid generator and/or the above sensitizing dye and/or the above oxidation catalyst in a solvent to be described later and diluting.

In the case of using a solvent, it is preferable to use an aromatic compound such as benzene, toluene, xylene, ethylbenzene, diethylbenzene, trimethylbenzene or triethylbenzene; cyclohexane; cyclohexene; decahydronaphthalene; dipentene; a saturated hydrocarbon compound such as n-pentane, i-pentane, n-hexane, i-hexane, n-heptane, i-heptane, n-octane, i-octane, n-nonane, i-nonane, n-decane or i-decane; ethylcyclohexane; methylcyclohexane; p-menthane; ethers such as dipropyl ether and dibutyl ether; ketones such as methyl isobutyl ketone (MIBK); or esters such as butyl acetate, cyclohexyl acetate and butyl stearate. In the case of using these solvents, two or more types of solvents may be mixed to adjust the solubility of polysilazane or adjust the evaporation rate of solvent.

The amount of solvent used (ratio) is selected so as to improve workability according to the coating method to be employed later. Since this varies according to the average molecular weight, molecular weight distribution and structure of the polysilazane used, they can be mixed freely as is appropriate. However, it is preferable that the polysilazane concentration be 0.1-50 wt%, and more preferably 0.1-40 wt%, in consideration of the stability and the production efficiency of the polysilazane.

In addition, a suitable filler and/or extender can be added to the photosensitive polysilazane composition according to the present invention as necessary. Examples of fillers include fine particles of oxide-based inorganic substances such as silica, alumina, zirconia or

mica, or non-oxide-based inorganic substances such as silicon carbide and silicon nitride. A powder of metal such as aluminum, zinc and copper may also be added to the composition, depending on applications. These fillers may be in the form of needles (including whiskers), particles, scales or various other forms, and they may be used alone or as a mixture of two or more types. In addition, the particle size of these fillers is preferably smaller than the film thickness that can be applied once. In addition, the amount of filler added is within the range of 0.05-10 parts by weight, and particularly preferably 0.2-3 parts by weight, relative to 1 part by weight of polysilazane.

Various pigments, leveling agents, antifoaming agents, antistatic agents, UV absorbers, pH adjusters, dispersants, surface modifiers, plasticizers, drying accelerators and antirunning agents may be added as necessary to the photosensitive polysilazane composition of the present invention.

According to the present invention, a method is provided for forming a patterned silica-based ceramic film using the above photosensitive polysilazane composition. Namely, the method of the present invention comprises: a step in which a coated film is formed of a photosensitive polysilazane composition containing a polysilazane and a photoacid generator, a step in which said coated film is exposed to light in a pattern, and a step in which the exposed portion of said coated film is dissolved off.

An ordinary coating method, namely immersion, roll coating, bar coating, brush coating, spray coating, flow coating or spin coating and so forth is employed for forming the coated film of the photosensitive polysilazane composition according to the present invention, and coating can be performed on a suitable substrate such as a silicon substrate or glass substrate. In addition, if the base material is a film, coating can

also be performed by gravure coating. A drying step for the coated film can also be provided separately as desired.

5 The coated film can be given a desired film thickness by coating once or repeatedly coating two or more times as necessary. Although the desired film thickness varies according to the particular application, in the case of a photoresist, for example, a general indicator of film thickness is 0.05-2 μm , that in the case of an interlayer insulating film is 0.5-4 μm , and that in the case of a color filter or black matrix is 0.3-3 μm .

15 After forming a coated film of the photosensitive polysilazane composition of the present invention, in order to dry said coated film and reduce the amount of gas discharged later, it is preferable to pre-bake (heat-treat) said coated film. The pre-baking step can be carried out at a temperature of typically 40-200°C, and preferably 60-120°C, for 10-180 seconds, and preferably 30-90 seconds, in the case of using a hot plate, or for 20 1-30 minutes, and preferably 5-15 minutes, in the case of using a clean oven.

25 After forming a coated film of the photosensitive polysilazane composition of the present invention, and pre-baking as necessary, said coated film is exposed to light in a pattern. Examples of light sources that can be used include a high-pressure mercury lamp, low-pressure mercury lamp, metal halide lamp and excimer laser. The light used for exposure is typically light 30 having a wavelength of 360-430 nm (high-pressure mercury lamp) with the exception of applications involving hyperfine processing as in the manner of semiconductors. In the case of liquid crystal displays in particular, light having a wavelength of 430 nm is frequently used. 35 In such cases, it is advantageous to combine a sensitizing dye with the photosensitive polysilazane

composition of the present invention as was previously described.

Although varying according to the light source and expected film thickness, the energy of the radiated light is typically 5-4000 mJ/cm², and preferably 10-2000 mJ/cm². If this energy is lower than 5 mJ/cm², the polysilazane is not adequately decomposed, and conversely, if this energy exceeds 4000 mJ/cm², exposure becomes excessive, possibly inviting the occurrence of halation.

In order to expose to light in a pattern, an ordinary photomask may be used, and such photomasks are commonly known to persons with ordinary skill in the art.

Although the environment during exposure may typically be an ambient atmosphere (air) or nitrogen, the atmosphere may also be enriched with oxygen to promote decomposition of polysilazane.

In the exposed portion of the photosensitive polysilazane composition that has been exposed to light in a pattern, the Si-N bond of the polysilazane is cleaved and, as a result of reacting with moisture in the atmosphere by going through a dangling bond state, a silanol (Si-OH) bond is formed and the polysilazane decomposes. In order to promote the formation of this silanol bond, water, and preferably pure water, may be brought in contact with the polysilazane composition following exposure. The exposed portion of the photosensitive polysilazane composition is removed by developing the coated film after exposure, and a pattern (positive type) is formed as a result of the non-exposed portion remaining on the substrate. Since the residual polysilazane hardly swells at all in the developing liquid to be described later, the pattern of the radiated light and the pattern of the polysilazane that is dissolved away are nearly completely identical, resulting in a satisfactory pattern accuracy (resolution).

An alkaline aqueous solution can be used for the

developing liquid during removal, namely development, of the exposed portion of the photosensitive polysilazane composition. Examples of such alkaline aqueous solutions include aqueous solutions of tetramethylammonium hydroxide (TMAH), sodium silicate, sodium hydroxide and potassium hydroxide. In the development in the present invention, it is convenient to use a roughly 2% aqueous solution of TMAH, which is the industry standard alkaline developing liquid.

Although varying according to film thickness and solvent, the time required for developing is typically 0.1-5 minutes, and preferably 0.5-3 minutes. In addition, the developing treatment temperature is typically 20-50°C, and preferably 20-30°C.

As a result of developing, the exposed portion of the photosensitive polysilazane composition is removed and patterning is completed. The patterned polysilazane film can be used as is as a photoresist having strong chemical resistance. Since the photoresist according to the present invention is of the positive type, it has high resolution and is highly resistant to dry etching. In particular, since the photoresist according to the present invention is highly resistant to oxygen plasma, it is extremely useful as an alternative material to silicon-containing resists in dual layer resist methods.

After etching a lower layer or substrate by using the photoresist according to the present invention as a protective film, the photoresist that is no longer required is removed. The polysilazane may be dissolved off using the above polysilazane solvent in order to remove the photoresist of the present invention.

In the case of using the patterned polysilazane film according to the present invention by allowing it to remain in the form of an interlayer insulating film and so forth, it may be converted to a silica-based ceramic coating having high heat resistance, low dielectric constant and excellent transparency, and so forth, by

allowing it to stand for a long period of time or by baking it. In the case of allowing a polysilazane film to stand after developing, it may typically be allowed to stand for a long time, for example one day or more, in an ambient atmosphere (in air at room temperature). In addition, in the case of baking, although varying according to the type of polysilazane used as well as the heat resistance of the substrate, electronic components and so forth, the baking temperature is typically 50-1000°C, preferably 100-1000°C and more preferably 150-450°C. Baking time is typically 5 minutes or more, and preferably 10 minutes or more. Although the baking atmosphere may typically be an ambient atmosphere (air), an atmosphere rich in oxygen and/or water vapor partial pressure may be used to promote the oxidation of polysilazane.

A silica-based ceramic coating obtained in this manner is able to demonstrate a dielectric constant of 5 or less, and depending on the particular case, 3.3 or less, as well as a resistivity of $10^{13}\Omega\text{cm}$ or more.

According to the present invention, since polysilazane can be patterned directly in a photolithography step, a conventional photoresist is no longer required in the patterning step of an insulating film or other ceramic film, thereby resulting in simplification of the process. Namely, as shown in Figs. 1A through 1F, although a coating/baking step for forming an insulating film on a substrate (1A), a coating/pre-baking step for forming a resist on an insulating film (1B), a mask alignment/exposure step in which exposure is performed in a pattern through a photomask (1C), a resist developing/post-baking step (1D), an insulating film etching step (1E) and a resist ashing step (1F) are required in the method of the prior art, according to the present invention, as shown in Figs. 2A through 2D, only a step for coating polysilazane (2A), a mask alignment/exposure step for exposing in a pattern through

a photomask (2B), a developing step (2C) and a baking step (2D) are required, thereby making it possible to eliminate the resist coating/pre-baking step and resist ashing step, making this invention extremely useful.

5 The following provides an additional explanation of the present invention through its examples.

Example 1

15 15 wt% of the photoacid generator t-butylperoxybenzoate was added to a 20% butyl acetate solution of polyphenylsilazane relative to the amount of polyphenylsilazane.

20 This solution was spin-coated (rotating speed: 1500 rpm) onto a silicon wafer to form a coated film. After hot air drying this coated film for 20 minutes at 70°C, it was exposed to light at 100 mJ/cm² of a KrF excimer laser having a wavelength of 248 nm through a photomask having a prescribed pattern.

25 Following exposure, the coated film was immersed for 2 minutes in pure water. When the coated film was subsequently immersed for 3 minutes in a 2% aqueous solution of tetramethylammonium hydroxide (TMAH) (developing liquid), the exposed portion of the coated film dissolved and a pattern originating in the photomask was formed. The patterning accuracy was 0.75 μm or better.

30 Following patterning, the coated film was heat-treated for 10 minutes at 170°C in an air atmosphere using a hot plate in order to dry the coated film and reduce the amount of subsequent degassing. The film thickness of the coated film after heat treatment was 0.45 μm.

35 The silicon wafer having this patterned coated film was placed in an asher (oxygen plasma ashing system), high-frequency power of 500 W and 13.56 MHz was applied at 500 millitorr (about 66.6 Pa), and the wafer was exposed to oxygen plasma for 10 minutes. When the

silicon wafer was subsequently taken out of the asher and the film thickness of the coated film was measured, it was found to be 0.43 μm , and demonstrated a residual ratio of about 96%. This result indicates that photosensitive polyphenylsilazane is useful as a photoresist.

Example 2

5 wt% of the photoacid generator 3,3',4,4'-tetra(t-butylperoxycarbonyl)benzophenone was added to a 15% cyclohexyl acetate solution of polymethylsilazane relative to the amount of polymethylsilazane.

This solution was spin-coated (rotating speed: 1500 rpm) onto a silicon wafer to form a coated film. After hot air drying this coated film for 20 minutes at 70°C, it was exposed to light at 100 mJ/cm² of a KrF excimer laser having a wavelength of 248 nm through a photomask having a prescribed pattern.

Following exposure, the coated film was immersed for 2 minutes in pure water. When the coated film was subsequently immersed for 3 minutes in a 2% aqueous solution of TMAH (developing liquid), the exposed portion of the coated film dissolved and a pattern originating in the photomask was formed. The patterning accuracy was 0.75 μm or more.

Following patterning, the coated film was heat-treated for 10 minutes at 170°C in an air atmosphere using a hot plate in order to dry the coated film and reduce the amount of subsequent degassing. The film thickness of the coated film after heat treatment was 0.51 μm .

The silicon wafer having this patterned coated film was placed in an asher, high-frequency power of 500 W and 13.56 MHz was brought in at 500 millitorr (about 66.6 Pa), and the wafer was exposed to oxygen plasma for 10 minutes. When the silicon wafer was subsequently taken out of the asher and the film thickness of the coated

film was measured, it was found to be 0.48 μm , and demonstrated a residual ratio of about 94%. This result indicates that photosensitive polymethylsilazane is useful as a photoresist.

5 Comparative Example

An acrylic positive resist (TOK: OFPR-800) was coated onto a silicon wafer to form a coated film of about 2 μm . This film was heat-treated for 20 minutes at 140°C in an air atmosphere using a hot plate.

10 When this resist film was exposed to oxygen plasma in an asher in the same manner as Example 1, the entire film was lost.

Example 3

15 5 wt% of the photoacid generator 3,3',4,4'-tetra(t-butylperoxycarbonyl)benzophenone was added to a 15% cyclohexyl acetate solution of polymethylsilazane relative to the amount of polymethylsilazane, followed by addition of 10 wt% of the sensitizing dye 7-diethylamino-4-trifluoroethylcoumarin relative to the amount of
20 polymethylsilazane.

This solution was spin-coated (rotating speed: 1500 rpm) onto a silicon wafer to form a coated film. After hot air drying this coated film for 10 minutes at 50°C, it was exposed to light at 50 mJ/cm² of a high-pressure
25 mercury lamp through a photomask having a prescribed pattern.

Following exposure, the coated film was immersed for 2 minutes in pure water. When the coated film was subsequently immersed for 3 minutes in a 2% aqueous
30 solution of TMAH (developing liquid), the exposed portion of the coated film dissolved and a pattern originating in the photomask was formed.


Following patterning, the coated film was pre-baked for 3 minutes at 150°C using a hot plate, and baked for 1
35 hour in a clean oven at 300°C to convert it into a ceramic. The film thickness of the baked film was 0.50

μm.

This baked film exhibited a resistivity of 5×10^{14} and a dielectric constant of 3.0. In addition, the transmittance of the baked film was 99.9% at 500 nm, and 99.1% at 400 nm. These results indicate that the photosensitive polymethylsilazane according to the present invention is also useful as a patternable interlayer insulating film having high insulation, low dielectric constant and excellent transparency.

Example 4

10 wt% of the photoacid generator α, α' -bis(t-butylperoxy)diisopropylbenzene was added to a 40% dibutyl ether solution of polyphenylsilazane relative to the amount of polybutylsilazane, followed by the addition of 5 wt% of the thiopyrylium salt sensitizing dye having the following formula relative to the amount of polyphenylsilazane.



This solution was spin-coated (rotating speed: 1500 rpm) onto a silicon wafer to form a coated film. After hot air drying this coated film for 20 minutes at 70°C, it was exposed to light at 50 mJ/cm² of a high-pressure mercury lamp through a photomask having a prescribed pattern.

Following exposure, the coated film was immersed for 2 minutes in pure water. When the coated film was subsequently immersed for 3 minutes in a 2% aqueous

solution of TMAH (developing liquid), the exposed portion of the coated film dissolved and a pattern originating in the photomask was formed.

Following patterning, the coated film was pre-baked for 3 minutes at 150°C using a hot plate, and baked for 1 hour in a baking oven at 400°C to convert it into a ceramic. The film thickness of the baked film was 2.5 μm .

This baked film exhibited resistivity of 7×10^{14} and a dielectric constant of 2.9. In addition, the transmittance of the baked film was 99% at 500 nm, and 96% at 400 nm. These results indicate that the photosensitive polyphenylsilazane according to the present invention is also useful as a patternable interlayer insulating film having high insulation, low dielectric constant and excellent transparency.

Example 5

10 wt% of the photoacid generator α, α' -bis(t-butylperoxy)diisopropylbenzene was added to a 15% dibutyl ether solution of polyphenylsiloxazane (oxygen content of 10 atomic % relative to Si) relative to the amount of polyphenylsiloxazane, followed by the addition of 5 wt% of thiopyrylium salt sensitizing dye.

This solution was spin-coated (rotating speed: 1500 rpm) onto a silicon wafer to form a coated film. After hot air drying this coated film for 3 minutes at 80°C, it was exposed to light at 50 mJ/cm² of a high-pressure mercury lamp through a photomask having a prescribed pattern.

Following exposure, the coated film was immersed for 2 minutes in pure water. When the coated film was subsequently immersed for 3 minutes in a 2% aqueous solution of TMAH (developing liquid), the exposed portion of the coated film dissolved and a pattern originating in the photomask was formed.

Following patterning, the coated film was pre-baked

for 5 minutes at 170°C using a hot plate, and baked for 1 hour in a baking oven at 400°C to convert the coated film into a ceramic. The film thickness of the baked film was 0.35 μm .

5 This baked film exhibited a resistivity of 5×10^{14} and a dielectric constant of 2.7. These results indicate that the photosensitive polyphenylsiloxazane according to the present invention is also useful as a patternable interlayer insulating film having high insulation and low
10 dielectric constant.

Example 6

5 wt% of esters (mixture of mono-, di- and tri-
esters) of 2,3,4-trihydroxybenzophenone and 6-diazo-5,6-
15 dihydro-5-oxo-naphthalene-1-sulfonic acid was added to a 20% PGMEA (propylene glycol monomethyl ether acetate) solution of polymethylsilazane relative to the amount of polymethylsilazane.

20 This solution was spin-coated (3000 rpm) onto a silicon wafer to form a coated film. After drying this coated film for 1 minute at 90°C over a hot plate, it was exposed to light at 40 mJ/cm² of a high-pressure mercury lamp through a photomask having a prescribed pattern.

25 Following exposure, the coated film was allowed to stand for 10 minutes in air. When the coated film was subsequently immersed for 1 minute in a 2.38% aqueous solution of TMAH, the exposed portion dissolved and a pattern originating in the photomask was formed.

30 When this film was baked for 30 minutes in a clean oven at 400°C followed by SEM observation, patterning was confirmed to have a minimum line width of 0.5 μm .

Industrial Application

35 According to the present invention, by adding an optically acid-generating agent to polysilazane and exposing to light in a pattern, the polysilazane dissolves, allowing a patterned polysilazane film to be

obtained following development.

5 The patterned polysilazane film can be used as it is as a photoresist. Since the photoresist according to the present invention is of the positive type, it has high resolution and higher resistance to oxygen plasma than organic material-based resists. In particular, since the polysilazane film according to the present invention has high resistance to oxygen plasma, it is extremely useful as an alternative material to silicon-containing resists
10 in dual layer resist methods.

In addition, by allowing the patterned polysilazane film according to the present invention to stand for a long period of time, or by baking it, a silica-based ceramic coating can be obtained that has preferable high
15 heat resistance, low dielectric constant and excellent transparency and so forth as an interlayer insulating film.

Positive patterning can be performed using an inexpensive light source such as a high-pressure mercury lamp by adding a sensitizing dye to the photosensitive
20 polysilazane composition of the present invention.


Moreover, by adding an oxidation catalyst to the composition of the present invention that contains a sensitizing dye, said sensitizing dye can be decomposed
25 during coating baking after patterning, thereby allowing a transparent, silica-based ceramic coating, that is useful as the interlayer insulating film of a liquid crystal display and so forth to be obtained.

In addition, by adding a pigment to the photosensitive polysilazane composition according to the present invention, a color filter or black matrix can be
30 produced having excellent heat resistance, insulation and hardness as well as satisfactory pattern accuracy.

CLAIMS

1. A photosensitive polysilazane composition comprising a polysilazane and a photoacid generator.

2. The photosensitive polysilazane composition according to claim 1 wherein said polysilazane is mainly a polysilazane, or its modification product having a number average molecular weight of 100 to 50,000, that contains the skeleton represented with the following general formula (I):



(wherein, R¹, R² and R³ respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group).

3. The photosensitive polysilazane composition according to claim 1 wherein said polysilazane is mainly a polysilazane having a number average molecular weight of 100 to 100,000 that contains the skeleton represented with the following general formula (II):



(wherein, R⁴ and R⁵ respectively and independently represent a hydrogen atom, an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, a group other than these groups in which the portion bonded directly to silicon or nitrogen is carbon, an alkylsilyl group, an alkylamino group or an alkoxy group, and n is an arbitrary integer).

4. The photosensitive polysilazane composition according to claim 3 wherein, in the above formula (II),

R⁴ is a methyl group or phenyl group, and R⁵ is a hydrogen atom.

5. The photosensitive polysilazane composition according to claim 2 wherein said polysilazane
5 modification product is a polyorganosiloxazane having a number average molecular weight of 300 to 100,000 that contains, as its main repeating unit, -(RSiN₃)-, -(RSiN₂O)-, (RSiNO₂)- and -(RSiO₃)- (wherein, R is an alkyl group, an alkenyl group, a cycloalkyl group, an
10 aryl group, an alkylamino group or an alkylsilyl group).

6. The photosensitive polysilazane composition according to any one of claims 2 through 5 wherein said photoacid generator is a peroxide.

7. The photosensitive polysilazane composition
15 according to claim 6 wherein said peroxide is t-butyl peroxybenzoate, 3,3',4,4'-tetra(t-butylperoxycarbonyl)benzophenone or α,α'-bis(t-butylperoxy)diisopropylbenzene.

8. The photosensitive polysilazane composition
20 according to any one of claims 1 through 7 that additionally contains a sensitizing dye.

9. The photosensitive polysilazane composition according to claim 8 wherein said sensitizing dye is selected from coumarin, ketocoumarin and their
25 derivatives and thiopyrylium salts.

10. The photosensitive polysilazane composition according to either of claims 8 or 9 that additionally contains an oxidation catalyst.

11. The photosensitive polysilazane composition
30 according to claim 10 wherein said oxidation catalyst is palladium propionate.

12. A method of forming a patterned polysilazane film comprising: a step in which a coated film is formed of a photosensitive polysilazane composition comprising a
35 polysilazane and a photoacid generator, a step in which said coated film is exposed to light in a pattern, and a step in which the exposed portion of said coated film is

dissolved off.

13. The method according to claim 12 wherein, said dissolving off step is performed using a weakly alkaline aqueous solution.

- 5 14. A method of forming a patterned insulating film containing a step in which a patterned polysilazane film formed by the method according to claim 12 is converted to a silica-based ceramic coating by allowing the film to stand in an ambient atmosphere or by baking the film.

27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
22

ABSTRACT

A photosensitive polysilazane which may be used as a positive-tone photoresist, and a method of forming a patterned polysilazane film by use of such a composition are provided. The photosensitive polysilazane composition of the invention is characterized by comprising a polysilazane, particularly polymethylsilazane or polyphenylsilazane, and an optically acid-generating agent. The patterned polysilazane film is obtained by exposing a coating of the photosensitive polysilazane composition of the invention to light in a pattern and dissolving off the exposed portion.

Fig.1A

FORMATION OF INSULATING FILM
(COATING/BAKING)




Fig.1B

RESIST COATING/PRE-BAKING




Fig.1C

MASK ALIGNMENT/EXPOSURE

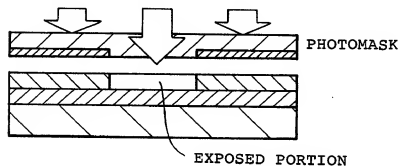


Fig.1D

RESIST DEVELOPMENT/POST-BAKING




Fig.1E

INSULATING FILM ETCHING




Fig.1F

RESIST ASHING



Fig.2A




Fig.2B

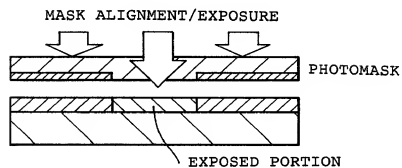


Fig.2C




Fig.2D



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私啓幕、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PHOTOSENSITIVE POLYSILAZANE COMPOSITION

AND METHOD OF FORMING PATTERNED
POLYSILAZANE FILM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☒ was filed on April 4, 2001
as United States Application Number or
PCT International Application Number
09/806,852 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定審されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一か国を指定している特許協力条約365条(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

10-282697 (Pat. Appln)

Japan

(Number)

(Country)

(番号)

(国名)

(Number)

(Country)

(番号)

(国名)

私、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(Filing Date)

(出願番号)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日まで期間中に入予された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(Filing Date)

(出願番号)

(出願日)

(Application No.)

(Filing Date)

(出願番号)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

05/10/1998

(Day/Month/Year Filed)

(出願年月日)

☐

(Day/Month/Year Filed)

(出願年月日)

☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(Filing Date)

(出願番号)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
 手続きを米特許商標局に対して遂行する弁理士または代理人
 として、下記の者を指名いたします。(弁理士、または代理人
 の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)
 Michael N. Meller-Registration No. 20778
 Eugene Lieberstein-Registration No. 24645

書類送付先

Send Correspondence to:

Anderson, Kill & Olick, P.C.
 1251 Avenue of the Americas
 New York, NY 10020-1182

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Michael N. Meller
 212-278-1000

唯一または第一発明者名

Full name of sole or first inventor

Tatsuro Nagahara

発明者の署名

日付

Inventor's signature

Date

May 18, 2001

住所

Residence

Kakegawa-shi, Shizuoka, Japan TPX

国籍

Citizenship

Japanese

私書箱

Post Office Address

1-5-2-301, Minami, Kakegawa-shi,

Shizuoka, 436-0029, Japan

第二共同発明者

Full name of second joint inventor, if any

Hideki Matsuo

第二共同発明者

日付

Second inventor's signature

Date

松尾英樹 May 18, 2001

住所

Residence

Kakegawa-shi, Shizuoka, Japan TPX

国籍

Citizenship

Japanese

私書箱

Post Office Address

2-12-13-205, Shimomatinami,

Kakegawa-shi, Shizuoka, 436-0026, Japan

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
 手続を米特許商標局に対して遂行する弁護士または代理人
 として、下記の者を指名いたします。(弁護士、または代理
 人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)
 Michael N. Meller-Registration No. 20779
 Eugene Lieberstein-Registration No. 24645

書類送付先

Send Correspondence to:
 Anderson, Kill & Olick, P.C.
 1251 Avenue of the Americas
 New York, NY 10020-1182

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)
 Michael N. Meller
 212-278-1000

第一または第一発明者名

300

third
 Full name of sole or first inventor
 Tomoko Aoki

発明者の署名

日付

Inventor's signature

Date

青木 倫子 May 18, 2001

住所

Residence

Kakegawa-shi, Shizuoka, Japan TPX

国籍

Citizenship

Japanese

私書箱

Post Office Address

1067-8-301, Kakegawa, Kakegawa-shi,
 Shizuoka, 436-0079, Japan

第二共同発明者

400

fourth
 Full name of second joint inventor, if any
 Kazuhiro Yamada

第二共同発明者

日付

Second inventor's signature

Date

山田 浩 May 18, 2001

住所

Residence

Yokohama-shi, Kanagawa, Japan TPX

国籍

Citizenship

Japanese

私書箱

Post Office Address

5-8-424, Shimoda-cho, Kouhoku-ku,
 Yokohama-shi, Kanagawa, 223-0064, Japan

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)